


Part No. PPM8700

Steel Liftbar Installation Instructions

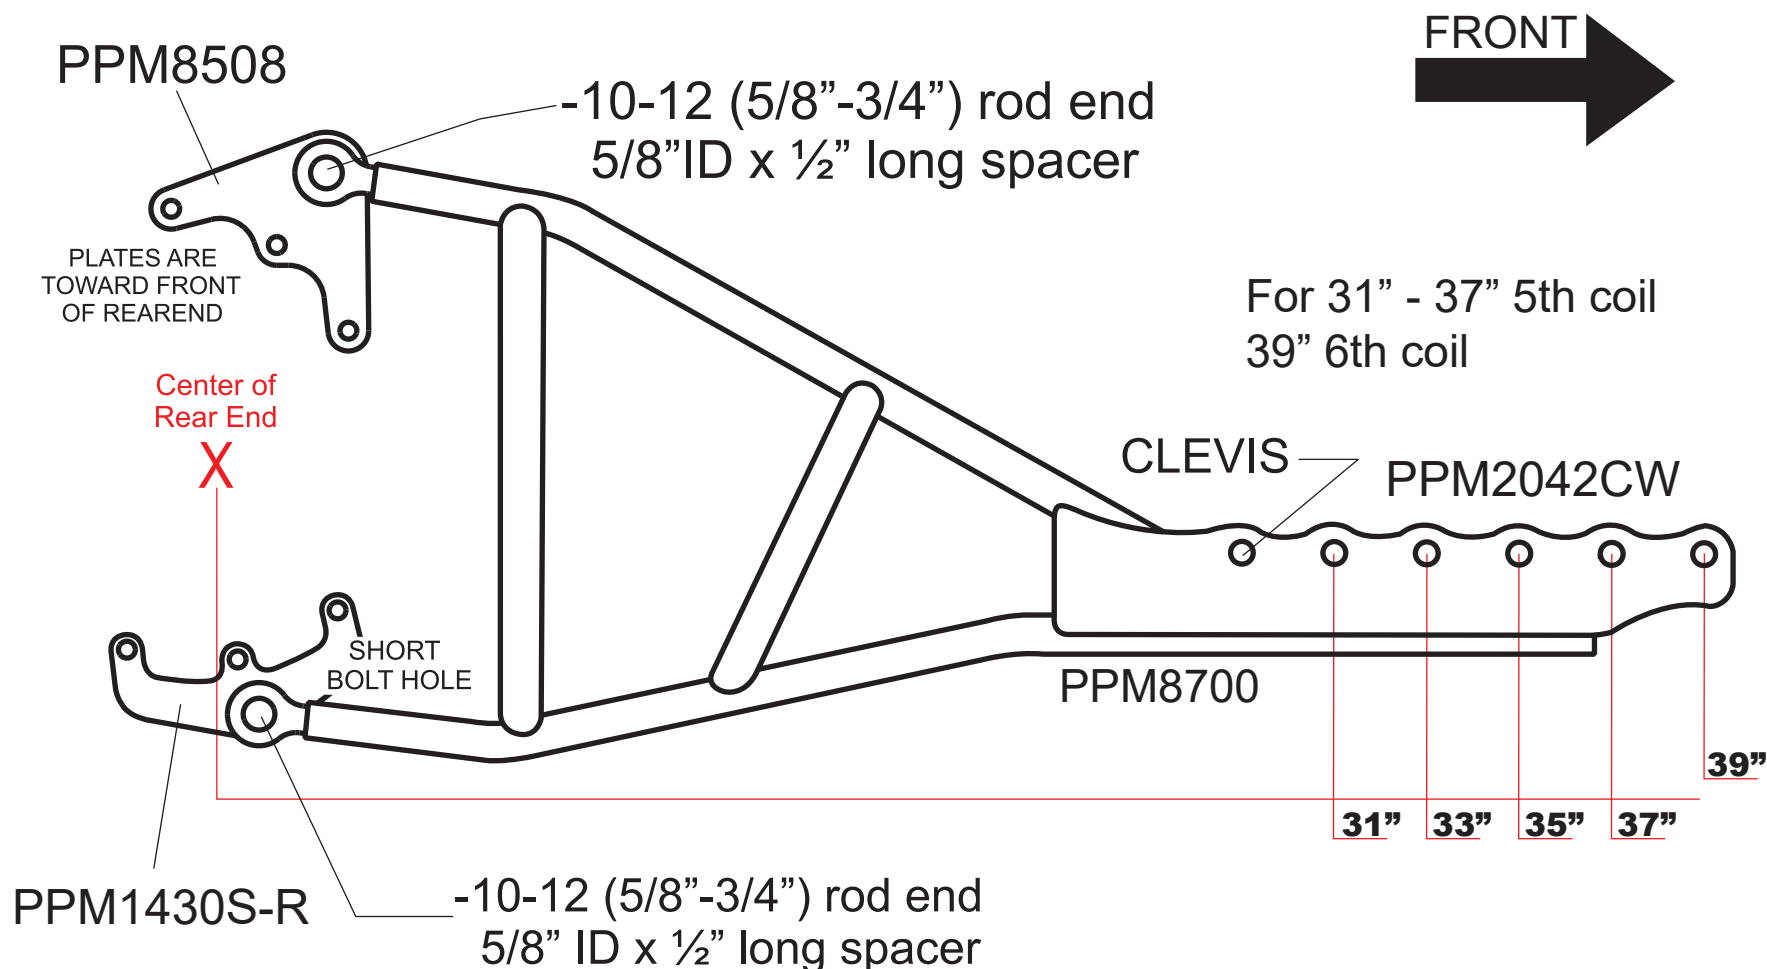

Rod Ends should be adjusted approximately 1-1/2" from center of hole to end of lift bar

- | | |
|--|---------------------------------|
| 2) PPM1430S-R - Bottom rearend plate (5/8" hole) | 2) PPM12500 1/2" X 1/2" Bushing |
| 2) PPM8508 Top rearend plate (5/8" hole) | 1) PPM12750 1/2" X 3/4" Bushing |
| 1) PPM2042CW clevis | |
| 2) PPM1440 5/8" ID Aluminum cross tubes | |
| 2) CMR10-12 (5/8"-3/4") Rod Ends | |
| 2) JNR-12 3/4" Jam Nuts | |
| 2) PPM58500 5/8" X 1/2" Bushing | |

Side Mounts Sold Separately - PPM8525-K, PPM8526-K, PPM8527-K



Technical Questions? Call 1-865-354-9669

www.PPMRACINGPRODUCTS.com